- **Technical Specification**

SPC FLOORING AUTOMATIC PACKAGING SYSTEM

Part I Production Overview

Main parameter	
Item	**Technical parameters**
Specification of SPC flooring	L: 920mm/1220mm/1250mcm W: 127mm~228.6mm(with slotting+6mm) T: 2mm~5mm Height of package: 30mm~80mm
Sealing type	Melt adhesive
Capacity	Automatic 8pcs/min
Carton board quantity	＜200pcs (thickness: 3mm)
Power	AC380V, 3P, 50HZ
Compressed air	0.6Mpa

Drawing of System:

ADD: Stars Union Equipment Technology (Jiangsu) CO., LTD
HuaChang Road, Science and Technology Zone ZJG, Jiangsu, CHINA
Email: admin@starsplas.com Contact: Andy Fang Web: https://www.starspals.com/
TEL: +86 512 56303759 FAX: +86 512 58535268 WhatsApp/Cell: 0086 18913613799

A **NTD** Group Company

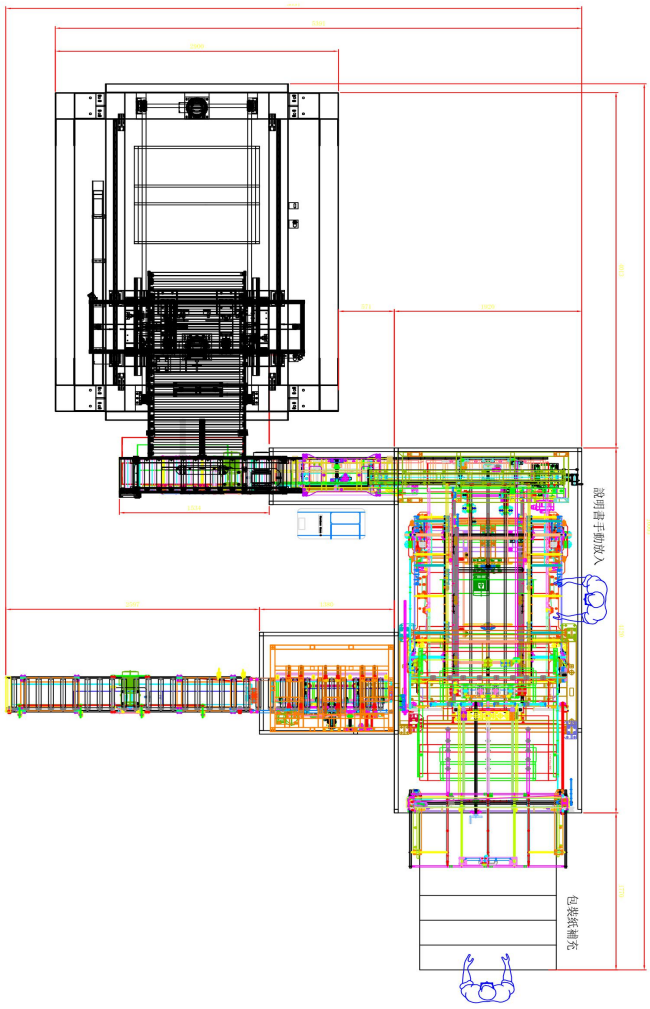

PRICE:

NO.	Commodity	Qty	Unit Price($)	Total Price($)
1	SPC Flooring Automatic Packaging System	1	250,000	250,000
Amount FOB Shanghai price			**$250,000**	

SAYS U.S. DOLLAR TWO HUNDRED AND FIFTY THOUSAND ONLY

OFFER VALIDITY : 30 days

DELIVERY TIME : 60 days (after down-payment)

TERMS OF PAYMENT:

30% of total price as down-payment, and the other 70% should be paid before delivery, both by T/T. The rate of penalty (for delay of the manufacture and delay of payment) is charged at 1 % for every 5 days, odd days less than 5 days should be counted as 5 days.

WARRANTY : Mechanical parts & Electrical parts

ADD: Stars Union Equipment Technology (Jiangsu) CO., LTD
HuaChang Road, Science and Technology Zone ZJG, Jiangsu, CHINA
Email: admin@starsplas.com Contact: Andy Fang Web: https://www.starspals.com/
TEL: +86 512 56303759 FAX: +86 512 58535268 WhatsApp/Cell: 0086 18913613799

12 months from starting and anyhow no longer than 14 months from the date of delivery for the parts considered by the manufacturer to be defective.

Parts of normal wear are excluded from warranty.

SITE INSTALLATION: Overall installation time about 20 working days, testing time is 5 w orking days, six days of each week, 7 am to 7 pm every day.

Installation personnel, a total of three persons, including shift leader one person, mechanical engineer one person, electrical engineer one person.

The site support worker 3-5 persons, it should provide by the buyer.

On-site installation equipment (cranes, forklifts, etc.) shall be the responsibility of the buyer, small tools and special tools provide by the supplier.

As for export, installation personnel return flight tickets, at buyer's s ite transportation and accommodation, and USD $100 per person per day of the cost of subsidies shall be borne by the buyer.

EXCLUSIONS ： Civil works.

Electrical cables connect the different machines forming the system with the main electrical control panel.

Installation and starting on the purchaser’s premises.

Cranes, minor metalwork and equipment that may turn out to be necessary during installation and starting on site.

Labour to aid our technician when starting.

Whatever else not specified in this offer.

ADD: Stars Union Equipment Technology (Jiangsu) CO., LTD
HuaChang Road, Science and Technology Zone ZJG, Jiangsu, CHINA
Email: admin@starsplas.com Contact: Andy Fang Web: https://www.starspals.com/
TEL: +86 512 56303759 FAX: +86 512 58535268 WhatsApp/Cell: 0086 18913613799